WN Series *Enclosed Cabinets*

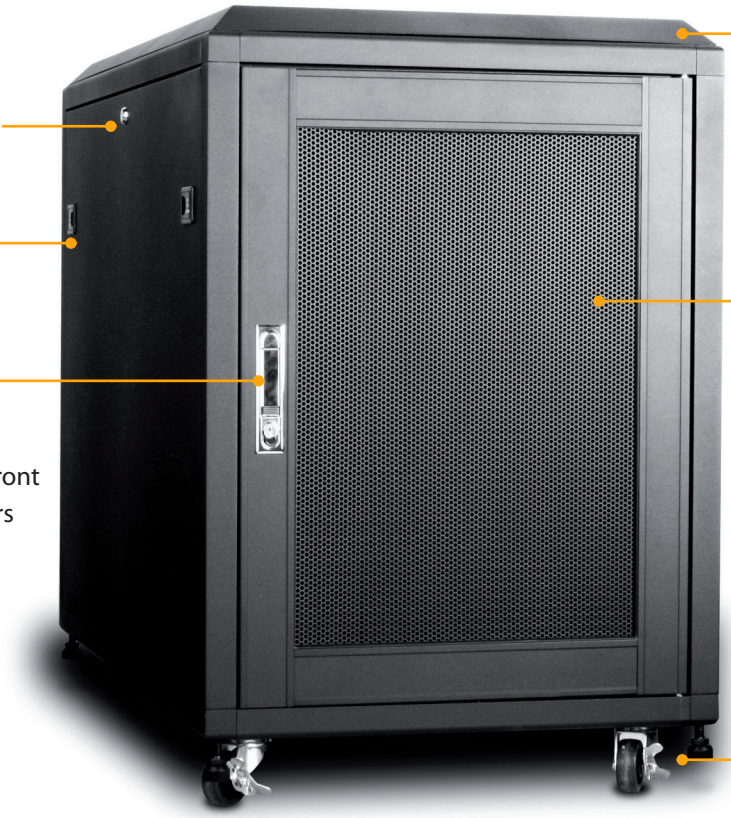
High-quality Steel Structure
Keylock
Removable Side Panels with Quick Latches
Vented Front/ Rear Doors
Keylocks on Front and Rear Doors
Heavy Duty Casters and Leveling Feet

Model No.	Form Factor	Dimension (inches)			Assembly Required?	Loading Capacity (lbs)	Door	Internal Depth	Internal Height	Removable Side panels	Security	Casters	Page No.
		W	H	D									
WN1510	15U	23.50	35.25	39.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 34.25″	27.25″	Yes	Key Lock	Yes	37
WN158	15U	23.50	35.25	31.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 26.5″	27.25″	Yes	Key Lock	Yes	38
WN2210	22U	23.50	47.75	39.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 34.25″	39.75″	Yes	Key Lock	Yes	38
WN228	22U	23.50	47.75	31.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 26.5″	39.75″	Yes	Key Lock	Yes	38
WN3610	36U	23.50	71.75	39.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 34.25″	64.25″	Yes	Key Lock	Yes	39
WN368	36U	23.50	71.75	31.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 26.5″	64.25″	Yes	Key Lock	Yes	39
WN4210	42U	23.50	82.50	39.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 34.25″	75″	Yes	Key Lock	Yes	39
WN428	42U	23.50	82.50	31.50	No	2200	Yes	Post-to-post: 17.75″ Hole-to-hole: 18.5″ Max Depth: 26.5″	75″	Yes	Key Lock	Yes	40

727 Phillips Drive, City of Industry, CA 91748 | TEL:1-888-989-1189 | FAX: 1-626-301-0588 | www.istarusa.com

WN1510

15U 1000mm Depth Rack-mount Server Cabinet



Features

- Universal Fit Most of Rackmount Chassis and Equipment
- Double Rear Doors Provide Convenience and Take Less Space to Open
- Front, Rear, and Side Security Lock to Prevent Unauthorized Access to Equipment and Data
- Easy Cabling Management. Cable Entry Provided from Top/ Bottom and Front/ Back
- Fully Adjustable Rails. Mounting Rails are Horizontally Adjustable to Ensure the Best Fit of Rack-mount Chassis
- Vented Doors Provide Maximum Air Flow
- 120mm AC Cooling Fans Provide Excellent Air Circulation
- Custom Front Panel Door with Silk Screen Option Enhance Product Image and Uniformity in Product Line

Introduction

The WN Series Cabinet is built with high-quality aluminum/steel structures. With vented doors and cooling fans, WN series provides excellent air circulation for servers and other devices. Cabinet is completely lockable from the front/ rear doors and side panels to prevent unauthorized access. This stylish and secure 19" rack-mount cabinet protects your investment in computer equipment against environmental elements heat and dust. WN Series offer a superior environment for mission-critical equipment.

Shipping Information

Shipper Design	Standard Carton
Shipper Dimension (inch)	41x25x35
Weight	180 lbs
Pallet Load	2
40-feet HQ Container Loading	82

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 34.25"
Internal Height	27.25"

Accessories

WA-CM1UB	1U Cable Management Rack Kit
WA-CM2UB	2U Cable Management Rack Kit
WA-DT0414	1U Digital Temperature Unit
WA-KBR96B	1U Compact Sliding Keyboard Drawer
WA-LB96B	Cabinet Supporting Bar
WA-P1UB	1U Cabinet Front Cover Plate
WA-P2UB	2U Cabinet Front Cover Plate
WA-P3UB	3U Cabinet Front Cover Plate
WA-PD010	10 Outlet Overload Circuit Breaker Protection Power Distribution Unit
WA-PD014	14 Outlet Lightening Surge Protection Power Distribution Unit
WA-PS010	10 Outlet Power Strip
WA-PS06A	6 Outlet Power Strip
WA-SF120-2FAN	Cabinet 120mm AC Cooling Fans
WA-SF96B	Heavy Duty Rackmount Shelf
WA-SFR80B	Heavy Duty Sliding Tray
WA-SFR96B	Heavy Duty Sliding Tray
WA-SW10-M6	Cabinet/ Rack Screw Kit

WN158

15U 800mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 26.5"
Internal Height	27.25"

WN2210

22U 1000mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 34.25"
Internal Height	39.75"

WN228

22U 800mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 26.5"
Internal Height	39.75"

727 Phillips Drive, City of Industry, CA 91748 | TEL:1-888-989-1189 | FAX: 1-626-301-0588 | www.istarusa.com

WN3610

36U 1000mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 34.25"
Internal Height	64.25"

WN368

36U 800mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 26.5"
Internal Height	64.25"

WN4210

42U 1000mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 34.25"
Internal Height	75"

WN428

42U 800mm Depth Rack-mount Server Cabinet

Specifications

Color	Black (Special Color on Request)
Material	Side Panel: SPCC t:0.8mm Horizontal Rails: SPCC t:2.0mm Vertical Rails: SPCC t:2.0mm Top Panel: SPCC t:1.2mm
Cooling	Up to 3 sets (2 fans per set) of 120 AC Fans. Pre-installed 1 set.
Basic Equipment	Variable 19" Profiles at Front and Backside Vented Lockable Front and Rear Doors Lockable Side Panel
Internal Dimensions	Post-to-post: 17.75" Hole-to-hole: 18.5" Max Depth: 26.5"
Internal Height	75"

Drawing

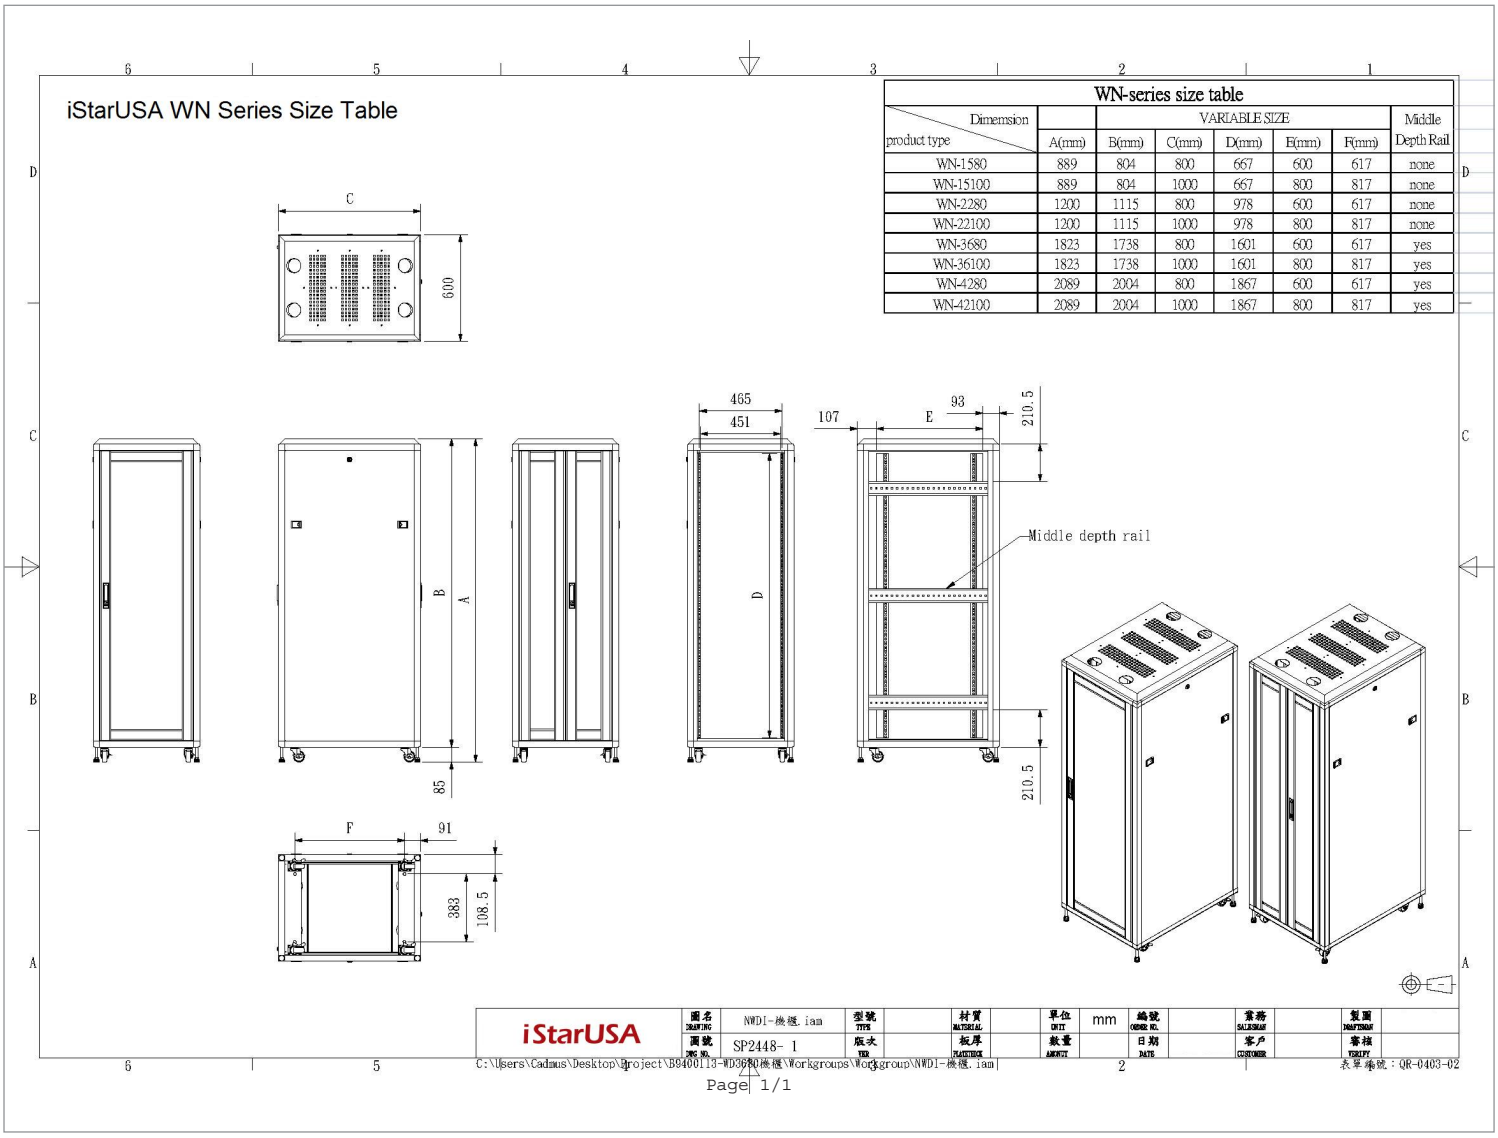

727 Phillips Drive, City of Industry, CA 91748 | TEL:1-888-989-1189 | FAX: 1-626-301-0588 | www.istarusa.com